

PRODUCT CODES: CT10 - CT52

CLIPS FOR TUBE



FEATURES

- **EASE OF USE**
Quick to install. Simply snap on to tube.
- **VERSATILE**
Re-usable. Convenient one-piece design.
- **RELIABLE**
Secure. Corrosion resistant.
High chemical resistance.
High temperature resistance.
- **COMPREHENSIVE**
Full range shown overleaf.



Printed on 100% Recycled Paper

CLIPS FOR TUBE


SPECIFICATIONS:

PRODUCT CODE	O.D. Nominal Size	RANGE (mm)	SUITS POLYTHENE TUBE*
CT10	10mm	9-10	-
CT12	12mm	11-12	-
CT13	13mm	12-13	10mm
CT14	14mm	13-14	-
CT15	15mm	15	13mm
CT17	17mm	16-18	-
CT19	19mm	18-19	16mm
CT20	20mm	19-20	-
CT21	21mm	20-22	-
CT23	23mm	22-23	19mm
CT24	24mm	23-25	-
CT26	26mm	25-27	-
CT29	29mm	27-30	25mm
CT32	32mm	30-33	-
CT36	36mm	34-36	-
CT37	37mm	35-38	32mm
CT40	40mm	38-42	-
CT46	46mm	43-46	-
CT52	52mm	48-52	-

*LOW DENSITY POLYETHYLENE TUBE MANUFACTURED TO AUSTRALIAN STANDARD AS2698.1

INSTALLATION:

1. Position clip around tube and squeeze jaws together by hand.
2. The clip can then be further secured using pliers or multigrips.
3. To remove, use pliers to hold top jaw of clip and slide sideways.

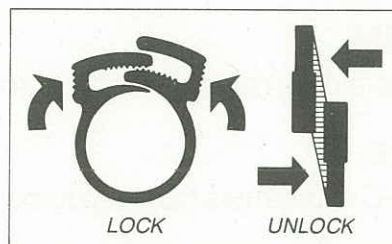

RECOMMENDED USE: Products described above are designed and manufactured for micro irrigation use and therefore have a maximum recommended operating pressure of 300kPa. The products must be used with suitable filtration (where applicable) to avoid blockage or damage to working components.

SPECIFICATIONS

The Company engages in a policy of continuous development and improvement of its products. Therefore, the Company reserves the right to alter the design and/or specifications of any products or equipment without notice and without incurring liability.

WARRANTY & DISCLAIMER

Refer to our standard Terms and conditions of Sale.
COPYRIGHT © JULY 1992

WINGFIELD[®]
IRRIGATION